


# BM9R-T66HD

## 605-625W

### FOR UTILITY

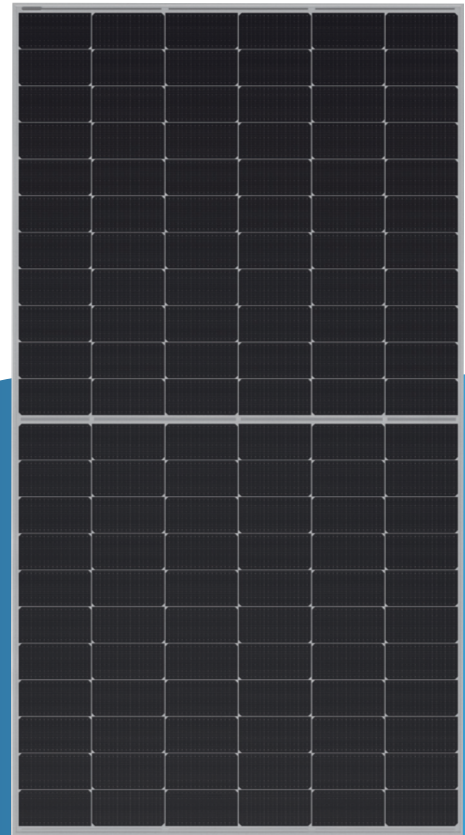


Maximum Power Output:

# 625W

Maximum Module Efficiency:

# 23.14%

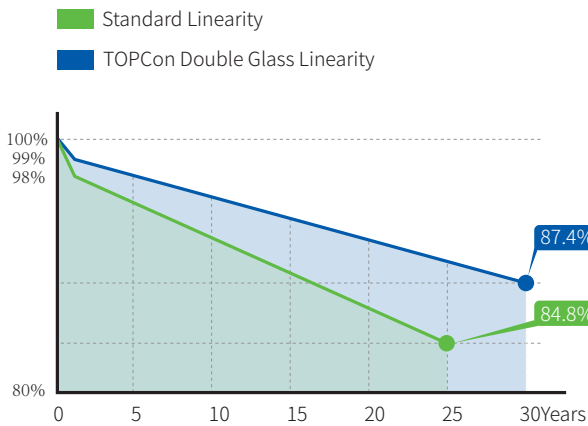

**15** years  
Product Warranty

**30** years  
Linear Power Warranty



### Super Power Output

Adopting high-density encapsulation and using BAJ advanced SMBB TOPCon cell provides ultra-high power output



### More Power Generation

Less than 1% 1st year degradation, lower temperature coefficient and better weak-light response combined with rear side gain improves module power generation



### Excellent Reliability Performance

Excellent harsh tests results and hot spot resistance improves product reliability for long-term life cycle



### Higher ROI


Reduce BOS and system LCOE dramatically, promote the project ROI

Electric Characteristics

Module Type	BM9R-T66HD-605		BM9R-T66HD-610		BM9R-T66HD-615		BM9R-T66HD-620		BM9R-T66HD-625	
	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI
Maximum Power (Pmax)[W]	605	670	610	675	615	680	620	685	625	690
Open-Circuit Voltage (Voc)[V]	48.48	48.71	48.68	48.91	48.88	49.11	49.08	49.31	49.28	49.51
Short-Circuit Current (Isc)[A]	15.82	17.44	15.90	17.51	15.98	17.59	16.06	17.66	16.14	17.74
Maximum Power Voltage (Vmp)[V]	40.31	40.51	40.46	40.66	40.61	40.81	40.76	40.96	40.91	41.11
Maximum Power Current (Imp)[A]	15.01	16.54	15.08	16.60	15.14	16.66	15.21	16.72	15.28	16.78
Module Efficiency	22.40%		22.58%		22.77%		22.95%		23.14%	
Power Tolerance	0~+5W									

(STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, Atmospheric quality AM 1.5G; BNPI: Rear side Irradiance 135W/m<sup>2</sup>, Cell temperature 25°C, Atmospheric quality AM 1.5G, Wind speed 1m/s)

Engineering Drawing

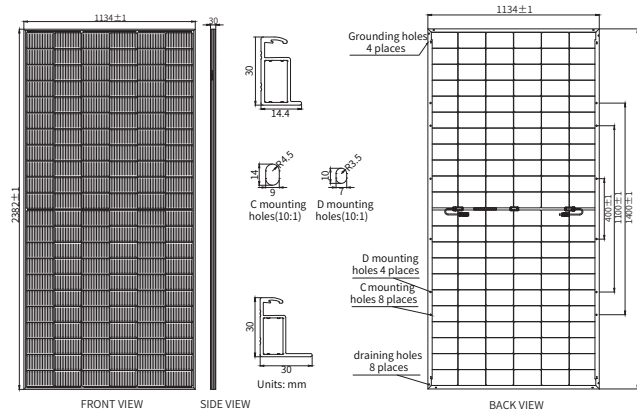


Product Specification

Cell Type	TOPCon Mono crystalline (16BB)
Number of Cells	132(6x22)
Dimensions	2382x1134x30mm
Weight	33.9kg
Glass	Front Glass, 2mm AR coated heat strengthened glass Back Glass, 2mm heat strengthened glass (white mesh)
Frame	Silver(Black), Anodized Aluminum Alloy
Output Cables	4mm <sup>2</sup> (IEC), 12AWG(UL) +300mm/-200 (including connector) or Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC4-EVO2 / MC4 Compatible
Packaging	36 Pieces/Pallet, 720 pieces/40' container

Operating Conditions

Maximum System Voltage	1500V DC (IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Maximum Static Load, Front Side	5400Pa
Maximum Static Load, Back Side	2400Pa
Nominal Operating Cell Temperature	45±2°C
Bifaciality	80±5%

Characteristics

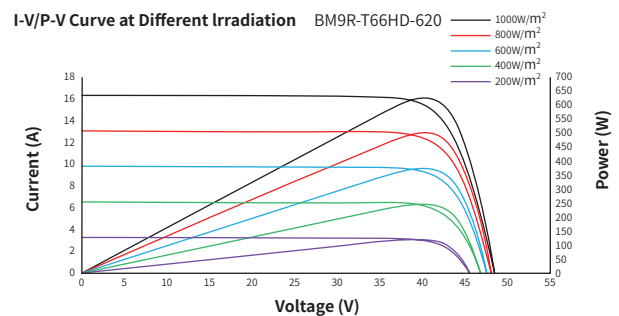

Temperature Coefficient

Temperature coefficient of Isc	+0.045%/°C
Temperature coefficient of Voc	-0.230%/°C
Temperature coefficient of Pmax	-0.290%/°C

