


BM9S-T66HD

690-710W

FOR UTILITY

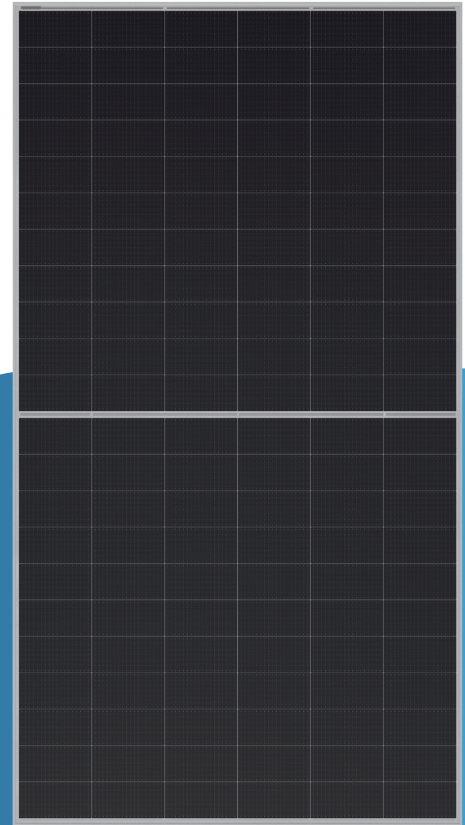


Maximum Power Output:

710W

Maximum Module Efficiency:

22.86%

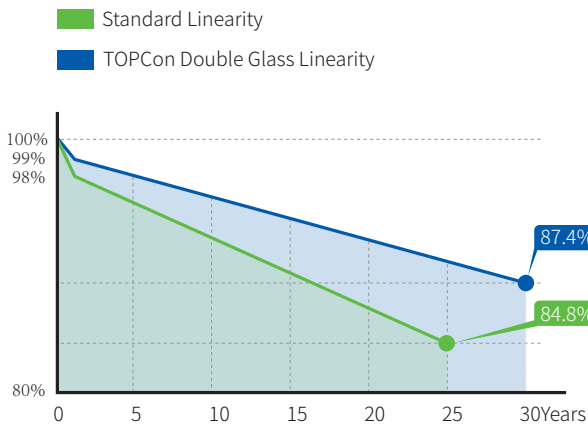

15 years
Product Warranty

30 years
Linear Power Warranty



Super Power Output

Adopting high-density encapsulation and using BAJ advanced SMBB TOPCon cell provides ultra-high power output



More Power Generation

Less than 1% 1st year degradation, lower temperature coefficient and better weak-light response combined with rear side gain improves module power generation



Excellent Reliability Performance

Excellent harsh tests results and hot spot resistance improves product reliability for long-term life cycle



Higher ROI


Reduce BOS and system LCOE dramatically, promote the project ROI

Electric Characteristics

Module Type	BM9S-T66HD-690		BM9S-T66HD-695		BM9S-T66HD-700		BM9S-T66HD-705		BM9S-T66HD-710	
	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI
Maximum Power (Pmax)[W]	690	765	695	770	700	775	705	780	710	785
Open-Circuit Voltage (Voc)[V]	48.10	48.28	48.30	48.48	48.50	48.68	48.70	48.88	48.90	49.08
Short-Circuit Current (Isc)[A]	18.24	20.15	18.28	20.18	18.32	20.21	18.36	20.24	18.40	20.27
Maximum Power Voltage (Vmp)[V]	40.10	40.31	40.30	40.49	40.50	40.67	40.70	40.85	40.90	41.03
Maximum Power Current (Imp)[A]	17.21	18.98	17.25	19.02	17.28	19.06	17.32	19.09	17.36	19.13
Module Efficiency	22.21%		22.37%		22.53%		22.70%		22.86%	
Power Tolerance	0~+5W									

(STC: Irradiance 1000W/m², Cell temperature 25°C, Atmospheric quality AM 1.5G; BNPI: Rear side Irradiance 135W/m², Cell temperature 25°C, Atmospheric quality AM 1.5G, Wind speed 1m/s)

Engineering Drawing

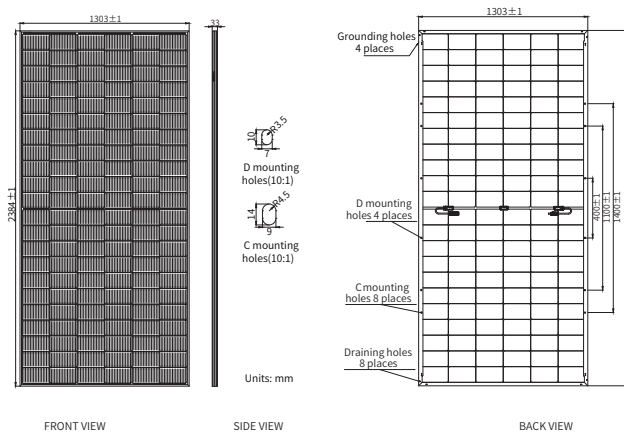

Product Specification

Cell Type	TOPCon Mono crystalline (18BB)
Number of Cells	132(6x22)
Dimensions	2384x1303x33mm
Weight	37.5kg
Glass	Front Glass, 2mm AR coated heat strengthened glass Back Glass, 2mm heat strengthened glass (white mesh)
Frame	Silver(Black), Anodized Aluminum Alloy
Output Cables	4mm ² (IEC), 12AWG(UL) ±1200mm (including connector) or Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC4-EVO2 / MC4 Compatible
Packaging	33 Pieces/Pallet, 594 pieces/40' container

Operating Conditions

Maximum System Voltage	1500V DC (IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	35A
Maximum Static Load, Front Side	5400Pa
Maximum Static Load, Back Side	2400Pa
Nominal Operating Cell Temperature	45±2°C
Bifaciality	80±5%

Temperature Coefficient

Temperature coefficient of Isc	+0.045%/°C
Temperature coefficient of Voc	-0.230%/°C
Temperature coefficient of Pmax	-0.290%/°C

Characteristics

